




SEQUENCE VALVE (Pilot Operated, Balanced Piston)

Ordering Code: **SQ-10W-X-Y-Z**

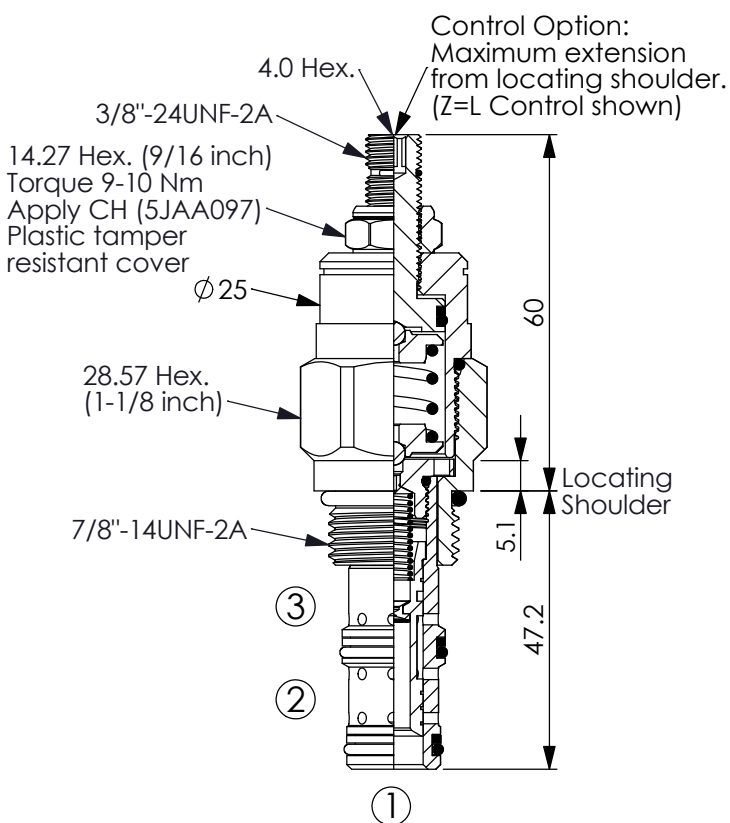

UNIT:mm

Performance Chart

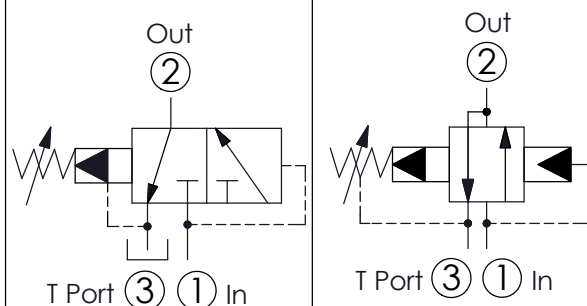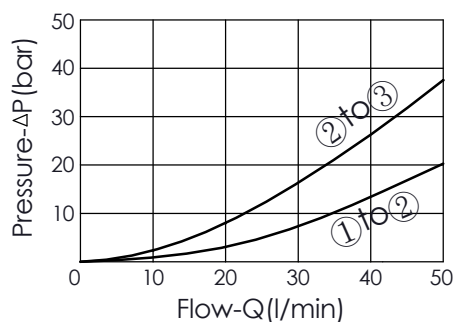

TECHNICAL DATA

Max. Operating pressure: 350 bar
(Refer To Performance Chart)

Rated flow: 46 l/min
(Refer To Performance Chart)

Cavity-Tooling: 10W-3

Installation torque: 44-56 Nm

Weight: 0.23 (Z=L) kg

X OPERATION

30 Internal Pilot & Drain

· Maximum Leakage Approximately
(15 cc/min./70 bar)

Y

SPRINGS

ADJUSTMENT RANGES

A 7-210 bar (70 bar Standard Setting)

B 3.5-105 bar (70 bar Standard Setting)

C 10.5-420 bar (70 bar Standard Setting)

N 3.5-55 bar (28 bar Standard Setting)

Q 3.5-28 bar (14 bar Standard Setting)

W 10.5-315 bar (70 bar Standard Setting)


Z

OPTIONS

L Leakproof hex. socket screw.



T Three-winged Handknob Kit.



K Handknob with Lock Knob.
(Order Code: 6ZAK001)

